


**⊕ Feature**

- High current , low DCR , high efficiency.
- Magnetically Shielded Structure.
- Low profile construction and miniature size.

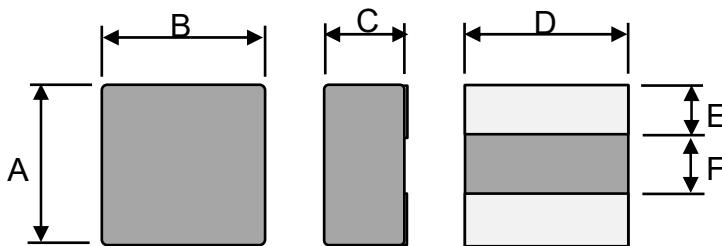
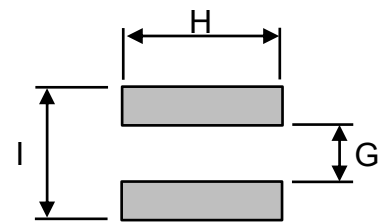
**⊕ Applications**

- DC to DC converters.
- Power line filtering.
- DVC/DSC/PDA, LCD display.

**⊕ Product Identification :**


Series name	Dimensions(LxWxH)		Internal code
MFPL	100706	1.0*0.7*0.65mm	H=High Current
	303020	3.0*3.0*2.0mm	D=Design

Inductance		Tolerance	
R13	13 nH	M	20%
R68	68 nH	N	30%

**⊕ Shapes And Dimensions**

**⊕ Recommended PCB Pattern**


Part No.	Dimensions(mm)								
	A	B	C	D	E	F	G	H	I
MFPL100706DH	1.00±0.1	0.70±0.1	0.65Max	0.70 Typ	0.35 Typ	0.30 Typ	0.20 Ref	0.80 Ref	1.20 Ref
MFPL121006H	1.20±0.2	1.00±0.2	0.65Max	1.00 Typ	0.40 Typ	0.40 Typ	0.30 Ref	1.10 Ref	1.40 Ref
MFPL141206H	1.40±0.2	1.20±0.2	0.65Max	1.20 Typ	0.45 Typ	0.50 Typ	0.45 Ref	1.30 Ref	1.60 Ref
MFPL141208H	1.40±0.2	1.20±0.2	0.80Max	1.20 Typ	0.45 Typ	0.50 Typ	0.45 Ref	1.30 Ref	1.60 Ref
MFPL160806H	1.60±0.2	0.80±0.2	0.65Max	0.80 Typ	0.40 Typ	0.50 Typ	0.40 Ref	0.90 Ref	1.80 Ref
MFPL160806DH	1.60±0.2	0.80±0.1	0.65Max	0.80 Typ	0.40 Typ	0.50 Typ	0.40 Ref	0.90 Ref	1.80 Ref
MFPL160808H	1.60±0.2	0.80±0.2	0.80Max	0.80 Typ	0.55 Typ	0.50 Typ	0.40 Ref	0.90 Ref	1.80 Ref
MFPL160810H	1.60±0.2	0.80±0.2	1.00Max	0.80 Typ	0.55 Typ	0.50 Typ	0.40 Ref	0.90 Ref	1.80 Ref
MFPL201206H	2.00±0.2	1.20±0.2	0.65Max	1.20 Typ	0.75 Typ	0.60 Typ	0.50 Ref	1.30 Ref	2.20 Ref
MFPL201208H	2.00±0.2	1.20±0.2	0.80Max	1.20 Typ	0.75 Typ	0.60 Typ	0.50 Ref	1.30 Ref	2.20 Ref
MFPL201210H	2.00±0.2	1.20±0.2	1.00Max	1.20 Typ	0.75 Typ	0.60 Typ	0.50 Ref	1.30 Ref	2.20 Ref
MFPL201608H	2.00±0.2	1.60±0.2	0.80Max	1.60 Typ	0.70 Typ	0.60 Typ	0.50 Ref	1.70 Ref	2.20 Ref
MFPL201610H	2.00±0.2	1.60±0.2	1.00Max	1.60 Typ	0.70 Typ	0.60 Typ	0.50 Ref	1.70 Ref	2.20 Ref
MFPL201612H	2.00±0.2	1.60±0.2	1.20Max	1.60 Typ	0.70 Typ	0.60 Typ	0.50 Ref	1.70 Ref	2.20 Ref
MFPL252008H	2.50±0.2	2.00±0.3	0.80Max	2.00 Typ	0.90 Typ	0.70 Typ	0.70 Ref	2.10 Ref	2.70 Ref
MFPL252010H	2.50±0.2	2.00±0.3	1.00Max	2.00 Typ	0.90 Typ	0.70 Typ	0.70 Ref	2.10 Ref	2.70 Ref
MFPL252012H	2.50±0.2	2.00±0.3	1.20Max	2.00 Typ	0.90 Typ	0.70 Typ	0.70 Ref	2.10 Ref	2.70 Ref
MFPL322510H	3.20±0.2	2.50±0.3	1.00Max	2.55 Typ	1.15 Typ	0.90 Typ	0.90 Ref	2.80 Ref	3.60 Ref
MFPL322512H	3.20±0.2	2.50±0.3	1.20Max	2.55 Typ	1.15 Typ	0.90 Typ	0.90 Ref	2.80 Ref	3.60 Ref
MFPL303018H	3.00±0.2	3.00±0.3	1.80Max	3.00 Typ	1.00 Typ	1.00 Typ	0.90 Ref	3.30 Ref	3.60 Ref
MFPL303020H	3.00±0.2	3.00±0.3	2.00Max	3.00 Typ	1.00 Typ	1.00 Typ	0.90 Ref	3.30 Ref	3.60 Ref

**⊕ Equivalent Circuit Schematic :**

**⊕ Material List :**

No.	Location	Material
1	Core	Carbonyl Iron Particle or Equivalent
2	Wire	Flat Enamelled copper wire
3	Solder	Sn99.3 Cu0.7

1. Operating temperature -40°C ~ +125°C

2. Storage conditions -40°C ~ +125°C

3. Befor Unpacking Storage environment : 0°C~+40°C ; RH10%~70%

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL100706DH-1R5M	1.5 $\pm$ 20%	0.9	1.1	0.3	0.4	500	400	1MHz/1V
MFPL100706DH-2R6M	2.6 $\pm$ 20%	0.8	1	0.4	0.55	900	750	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL121006H-2R2M	2.2 $\pm$ 20%	1.2	1.3	0.9	1.0	340	280	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL141206H-R33M	0.33 $\pm$ 20%	4.1	4.4	4.1	4.4	32	26	1MHz/1V
MFPL141206H-R47M	0.47 $\pm$ 20%	3.1	3.4	2.8	3.0	45	37	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL141208H-R24M	0.24 $\pm$ 20%	5.7	6	3.8	4.1	27	22	1MHz/1V
MFPL141208H-R33M	0.33 $\pm$ 20%	5	5.3	3.7	4.0	28	23	1MHz/1V
MFPL141208H-R47M	0.47 $\pm$ 20%	4.3	4.6	3.5	3.8	35	29	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL160806DH-R22M	0.22 $\pm$ 20%	4.4	4.7	3.5	3.8	43	35	1MHz/1V
MFPL160806H-R47M	0.47 $\pm$ 20%	3.0	3.3	2.0	2.3	82	66	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL160808H-R22M	0.22 $\pm$ 20%	5.2	5.5	3.1	3.4	40	33	1MHz/1V
MFPL160808H-R24M	0.24 $\pm$ 20%	5.0	5.3	3.0	3.3	41	34	1MHz/1V
MFPL160808H-R47M	0.47 $\pm$ 20%	3.8	4.1	2.3	2.6	100	80	1MHz/1V
MFPL160808HD55-R47M	0.47 $\pm$ 20%	3.7	4.0	3.4	3.8	55	48	1MHz/1V
MFPL160808H-R56M	0.56 $\pm$ 20%	3.7	4.0	1.9	2.2	110	85	1MHz/1V
MFPL160808H-R68M	0.68 $\pm$ 20%	3.0	3.3	1.9	2.1	130	110	1MHz/1V
MFPL160808H-1R0M	1 $\pm$ 20%	2.8	3.0	1.9	2.1	200	180	1MHz/1V
MFPL160808HD115-1R0M	1 $\pm$ 20%	2.1	2.3	1.9	2.1	115	105	1MHz/1V
MFPL160808H-2R2M	2.2 $\pm$ 20%	1.3	1.5	1.2	1.4	260	220	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL160810H-R22M	0.22 $\pm$ 20%	6.2	6.5	4.2	4.5	35	28	1MHz/1V
MFPL160810H-R24M	0.24 $\pm$ 20%	6.0	6.3	4.1	4.4	35	28	1MHz/1V
MFPL160810H-R47M	0.47 $\pm$ 20%	4.5	4.8	3.7	4.0	80	65	1MHz/1V
MFPL160810H-R56M	0.56 $\pm$ 20%	3.9	4.2	3.2	3.5	95	70	1MHz/1V
MFPL160810H-R68M	0.68 $\pm$ 20%	3.3	3.6	2.7	3.0	115	90	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL201206H-1R0M	1 $\pm$ 20%	2.6	2.8	2.4	2.6	86	78	1MHz/1V
MFPL201206H-2R2M	2.2 $\pm$ 20%	1.6	1.8	1.5	1.7	230	215	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL201208H-R24M	0.24 $\pm$ 20%	6.2	6.5	6.2	6.5	23	18	1MHz/1V
MFPL201208H-R33M	0.33 $\pm$ 20%	4.9	5.2	2.9	3.2	45	33	1MHz/1V
MFPL201208H-R47M	0.47 $\pm$ 20%	4.7	5.0	2.8	3.1	50	34	1MHz/1V
MFPL201208HD28-R47M	0.47 $\pm$ 20%	4.9	5.2	4.4	4.7	28	24	1MHz/1V
MFPL201208H-R68M	0.68 $\pm$ 20%	3.9	4.2	3.4	3.7	60	50	1MHz/1V
MFPL201208H-1R0M	1 $\pm$ 20%	3.7	4.0	2.6	2.8	70	55	1MHz/1V
MFPL201208HD60-1R0M	1 $\pm$ 20%	3.0	3.2	3.0	3.2	60	52	1MHz/1V
MFPL201208H-2R2M	2.2 $\pm$ 20%	2.4	2.6	1.7	1.9	185	160	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL201210H-R10M	0.1 $\pm$ 20%	8.2	8.5	7.2	7.5	13	8	1MHz/1V
MFPL201210H-R22M	0.22 $\pm$ 20%	7.0	7.3	6.8	7.1	22	16	1MHz/1V
MFPL201210H-R24M	0.24 $\pm$ 20%	6.9	7.2	6.7	7.0	23	17	1MHz/1V
MFPL201210H-R33M	0.33 $\pm$ 20%	6.2	6.5	5.2	5.5	32	24	1MHz/1V
MFPL201210H-R47M	0.47 $\pm$ 20%	5.2	5.5	4.4	4.7	36	29	1MHz/1V
MFPL201210H-R68M	0.68 $\pm$ 20%	4.7	5.0	4.0	4.3	43	37	1MHz/1V
MFPL201210H-1R0M	1 $\pm$ 20%	3.7	4.0	3.6	3.9	63	55	1MHz/1V
MFPL201210H-1R5M	1.5 $\pm$ 20%	2.9	3.2	2.8	3.1	100	90	1MHz/1V
MFPL201210H-2R2M	2.2 $\pm$ 20%	2.5	2.7	1.8	2.0	150	135	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL201608H-R22M	0.22 $\pm$ 20%	5.8	6.1	6.3	6.6	19	14	1MHz/1V
MFPL201608H-R24M	0.24 $\pm$ 20%	5.7	6.0	6.2	6.5	20	14	1MHz/1V
MFPL201608H-R33M	0.33 $\pm$ 20%	5.5	5.8	5.2	5.5	24	18	1MHz/1V
MFPL201608H-R47M	0.47 $\pm$ 20%	5.2	5.5	4.3	4.6	27	24	1MHz/1V
MFPL201608H-R68M	0.68 $\pm$ 20%	4.9	5.1	3.5	3.8	44	39	1MHz/1V
MFPL201608H-1R0M	1 $\pm$ 20%	3.0	3.3	3.3	3.6	60	53	1MHz/1V
MFPL201608HD52-1R0M	1 $\pm$ 20%	4.1	4.4	3.4	3.7	52	45	1MHz/1V
MFPL201608H-1R5M	1.5 $\pm$ 20%	2.8	3.0	2.8	3.1	85	73	1MHz/1V
MFPL201608H-2R2M	2.2 $\pm$ 20%	2.3	2.5	2.0	2.2	140	123	1MHz/1V
MFPL201608H-3R3M	3.3 $\pm$ 20%	1.9	2.1	1.6	1.8	220	200	1MHz/1V
MFPL201608H-4R7M	4.7 $\pm$ 20%	1.5	1.7	1.4	1.6	290	260	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL201610H-R10M	0.1 $\pm$ 20%	8.7	9.0	8.2	8.5	12	7	1MHz/1V
MFPL201610H-R15M	0.15 $\pm$ 20%	8.4	8.7	7.3	7.6	14	8	1MHz/1V
MFPL201610H-R22M	0.22 $\pm$ 20%	7.9	8.2	6.6	6.9	18	11	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL201610H-R24M	0.24 $\pm$ 20%	7.7	8.0	6.5	6.8	19	12	1MHz/1V
MFPL201610H-R33M	0.33 $\pm$ 20%	6.7	7.0	5.4	5.7	22	17	1MHz/1V
MFPL201610H-R47M	0.47 $\pm$ 20%	6.0	6.3	5.2	5.5	25	22	1MHz/1V
MFPL201610H-R68M	0.68 $\pm$ 20%	4.9	5.2	4.3	4.6	32	25	1MHz/1V
MFPL201610H-1R0M	1 $\pm$ 20%	4.3	4.6	4.2	4.5	43	35	1MHz/1V
MFPL201610HD36-1R0M	1 $\pm$ 20%	4.4	4.7	4.3	4.6	36	31	1MHz/1V
MFPL201610H-1R5M	1.5 $\pm$ 20%	2.9	3.2	2.4	2.6	100	80	1MHz/1V
MFPL201610H-2R2M	2.2 $\pm$ 20%	2.8	3.0	2.3	2.5	130	120	1MHz/1V
MFPL201610H-3R3M	3.3 $\pm$ 20%	2.1	2.3	1.5	1.7	170	140	1MHz/1V
MFPL201610H-4R7M	4.7 $\pm$ 20%	1.8	2.0	1.4	1.6	220	190	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL201612H-R10M	0.1 $\pm$ 20%	12.0	13.0	11.0	12.0	6	4	1MHz/1V
MFPL201612H-R24M	0.24 $\pm$ 20%	8.7	9.2	8.6	9.1	11	9	1MHz/1V
MFPL201612H-R33M	0.33 $\pm$ 20%	7.5	7.8	7.4	7.7	15	10	1MHz/1V
MFPL201612H-R47M	0.47 $\pm$ 20%	6.4	6.7	6.4	6.7	17	13	1MHz/1V
MFPL201612H-1R5M	1.5 $\pm$ 20%	3.7	4.0	3.7	4.0	50	40	1MHz/1V
MFPL201612H-2R2M	2.2 $\pm$ 20%	2.9	3.1	3.0	3.3	90	77	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL252008H-1R0M	1 $\pm$ 20%	4.2	4.5	4.0	4.3	40	34	1MHz/1V
MFPL252008H-2R2M	2.2 $\pm$ 20%	2.8	3.0	2.8	3.0	77	69	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL252010H-R22M	0.22 $\pm$ 20%	8.3	8.6	6.5	6.8	17	12	1MHz/1V
MFPL252010H-R24M	0.24 $\pm$ 20%	8.2	8.5	6.4	6.7	17.5	12	1MHz/1V
MFPL252010H-R33M	0.33 $\pm$ 20%	7.3	7.6	6.2	6.5	19	13	1MHz/1V
MFPL252010H-R47M	0.47 $\pm$ 20%	6.6	6.9	5.8	6.1	22	15	1MHz/1V
MFPL252010HD15-R47M	0.47 $\pm$ 20%	6.3	6.6	6.2	6.5	15	13	1MHz/1V
MFPL252010H-R68M	0.68 $\pm$ 20%	5.6	5.9	5.3	5.6	27	23	1MHz/1V
MFPL252010H-1R0M	1 $\pm$ 20%	5.0	5.3	4.2	4.5	30	25	1MHz/1V
MFPL252010H-1R5M	1.5 $\pm$ 20%	4.0	4.3	3.1	3.4	55	45	1MHz/1V
MFPL252010H-2R2M	2.2 $\pm$ 20%	3.0	3.3	2.2	2.4	70	62	1MHz/1V
MFPL252010H-3R3M	3.3 $\pm$ 20%	2.6	2.8	2.3	2.5	100	86	1MHz/1V
MFPL252010H-4R7M	4.7 $\pm$ 20%	2.4	2.6	1.8	2	180	160	1MHz/1V
MFPL252010H-6R8M	6.8 $\pm$ 20%	2.2	2.4	1.4	1.6	320	270	1MHz/1V
MFPL252010H-100M	10 $\pm$ 20%	1.35	1.55	0.85	1.05	560	500	1MHz/1V
MFPL252010H-220M	22 $\pm$ 20%	0.9	1.1	0.65	0.85	1300	1100	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL252012H-R10M	0.1 $\pm$ 20%	12.5	13.5	11.0	12.0	10	6	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL252012H-R15M	0.15 $\pm$ 20%	12.0	13.0	10.5	11.5	11	7	1MHz/1V
MFPL252012H-R22M	0.22 $\pm$ 20%	9.3	9.6	7.9	8.2	14	9	1MHz/1V
MFPL252012H-R24M	0.24 $\pm$ 20%	9.0	9.3	7.7	8.0	15	10	1MHz/1V
MFPL252012H-R33M	0.33 $\pm$ 20%	8.0	8.3	6.5	6.8	17	11	1MHz/1V
MFPL252012H-R47M	0.47 $\pm$ 20%	7.2	7.5	6.2	6.5	19	13	1MHz/1V
MFPL252012H-R68M	0.68 $\pm$ 20%	6.2	6.5	6.0	6.3	23	17	1MHz/1V
MFPL252012H-1R0M	1 $\pm$ 20%	5.3	5.6	3.7	4.0	42	35	1MHz/1V
MFPL252012HD22-1R0M	1 $\pm$ 20%	6.3	6.5	4.9	5.2	22	16	1MHz/1V
MFPL252012H-1R5M	1.5 $\pm$ 20%	4.2	4.5	3.4	3.7	50	44	1MHz/1V
MFPL252012HD32-1R5M	1.5 $\pm$ 20%	4.4	4.7	4.3	4.6	32	27	1MHz/1V
MFPL252012H-2R2M	2.2 $\pm$ 20%	3.5	3.8	2.4	2.6	75	55	1MHz/1V
MFPL252012H-3R3M	3.3 $\pm$ 20%	2.8	3.0	2.1	2.3	97	80	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL252012H-4R7M	4.7 $\pm$ 20%	2.0	2.2	1.3	1.5	220	210	1MHz/1V
MFPL252012HD17-4R7M	4.7 $\pm$ 20%	2.2	2.4	1.6	1.8	170	150	1MHz/1V
MFPL252012H-6R8M	6.8 $\pm$ 20%	1.8	2.0	1.4	1.6	270	245	1MHz/1V
MFPL252012H-100M	10 $\pm$ 20%	1.4	1.6	1.0	1.2	400	330	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL322510H-R33M	0.33 $\pm$ 20%	8.0	8.3	8.0	8.3	15	11	1MHz/1V
MFPL322510H-R47M	0.47 $\pm$ 20%	8.0	8.3	6.1	6.4	22	17	1MHz/1V
MFPL322510H-R68M	0.68 $\pm$ 20%	7.2	7.5	5.9	6.2	28	22	1MHz/1V
MFPL322510H-1R0M	1 $\pm$ 20%	5.7	6.0	5.1	5.4	30	25	1MHz/1V
MFPL322510H-1R5M	1.5 $\pm$ 20%	4.7	5.0	3.7	4.0	42	34	1MHz/1V
MFPL322510H-2R2M	2.2 $\pm$ 20%	3.7	4.0	3.4	3.7	66	55	1MHz/1V
MFPL322510H-3R3M	3.3 $\pm$ 20%	3.4	3.7	2.5	2.7	120	105	1MHz/1V
MFPL322510H-4R7M	4.7 $\pm$ 20%	2.6	2.8	2.1	2.3	140	125	1MHz/1V
MFPL322510H-100M	10 $\pm$ 20%	2.0	2.2	2.0	2.2	365	325	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL322512H-R10M	0.1 $\pm$ 20%	17.0	18.0	11.0	12.0	7	5.2	1MHz/1V
MFPL322512H-R22M	0.22 $\pm$ 20%	11.2	11.5	8.9	9.2	10	6.6	1MHz/1V
MFPL322512H-R24M	0.24 $\pm$ 20%	10.7	11.0	8.7	9.0	12	7	1MHz/1V
MFPL322512H-R33M	0.33 $\pm$ 20%	9.2	9.5	8.2	8.5	14	9	1MHz/1V
MFPL322512H-R47M	0.47 $\pm$ 20%	8.3	8.6	7.2	7.5	19	14	1MHz/1V
MFPL322512HD14-R47M	0.47 $\pm$ 20%	8.3	8.6	7.2	7.5	14	11	1MHz/1V
MFPL322512H-R68M	0.68 $\pm$ 20%	7.8	8.1	7.0	7.3	23	18	1MHz/1V
MFPL322512HD15-R68M	0.68 $\pm$ 20%	7.7	8.0	6.7	7.0	15	12	1MHz/1V
MFPL322512H-1R0M	1 $\pm$ 20%	6.3	6.6	5.0	5.3	30	26	1MHz/1V
MFPL322512HD21-1R0M	1 $\pm$ 20%	7.4	7.7	5.2	5.5	21	18	1MHz/1V
MFPL322512H-1R5M	1.5 $\pm$ 20%	4.8	5.1	4.4	4.7	44	37	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL322512H-2R2M	2.2 $\pm$ 20%	4.3	4.6	3.3	3.6	70	58	1MHz/1V
MFPL322512HD50-2R2M	2.2 $\pm$ 20%	4.7	5.0	3.5	3.8	50	42	1MHz/1V
MFPL322512H-3R3M	3.3 $\pm$ 20%	3.4	3.7	2.7	2.9	95	75	1MHz/1V
MFPL322512H-4R7M	4.7 $\pm$ 20%	2.7	2.9	2.1	2.3	135	115	1MHz/1V
MFPL322512H-6R8M	6.8 $\pm$ 20%	2.6	2.8	2.0	2.2	210	177	1MHz/1V
MFPL322512H-100M	6.8 $\pm$ 20%	2.1	2.3	2.0	2.2	230	210	1MHz/1V

**⊕ Electrical Characteristics :**

Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL303018H-R22M	0.22 $\pm$ 20%	15.0	16.0	9.5	10.0	7	5.5	1MHz/1V
MFPL303018H-1R5M	1.5 $\pm$ 20%	6.8	7.0	6.6	6.8	26	20	1MHz/1V
MFPL303018H-4R7M	4.7 $\pm$ 20%	3.9	4.2	3.1	3.4	87	72	1MHz/1V

**⊕ Electrical Characteristics :**

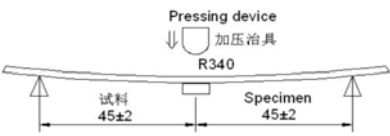
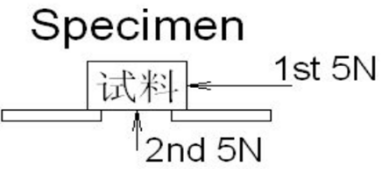
Part No.	Inductance ( $\mu$ H)	Isat (A)		Irms (A)		DCR (m $\Omega$ )		Test Frequency
		Max	Typ	Max	Typ	Max	Typ	
MFPL303020H-1R0M	1 $\pm$ 20%	7.7	8.0	6.2	6.5	20	14	1MHz/1V
MFPL303020H-1R5M	1.5 $\pm$ 20%	6.7	7.0	6.0	6.3	25	19	1MHz/1V
MFPL303020H-2R2M	2.2 $\pm$ 20%	5.7	6.0	4.4	4.7	45	37	1MHz/1V

Isat : DC Saturation Current that will cause initial inductance to drop approximately 30% max.

Irms : DC Current that will cause an approximate  $\Delta$ T of 40 °C

Test Instrument : L (WK6500B), RDC(HIOKI RM3542A), Isat & Irms (WK3260B+WK3265B) or equivalent.

**⊕ General Characteristics**

項目 Item	Conditions	Specification
温度特性 Temperature drift	在温度-40 ~ + 125°C之间测试。 To be measured in the range of -40°C to 125°C.	Inductance temperature coefficient 2000 ppm/°C or less
保存温度范围 Storage Temperature	在包装的状态下。 With taping.	- 40°C ~ + 125°C
使用温度范围 Operating Temperature	包括制品的发热温度。 Including self temperature rise.	- 40°C ~ + 125°C
弯曲测试 Bending test	<p>试件焊接在基板上，按箭头方向以大约0.5mm/秒的速度加压，直到基板变形幅度到3mm 保持30 秒。</p> <p>Apply pressure gradually in the direction of the arrow at a rate of about 0.5mm/s until bent depth reaches 3mm and hold for 30±5s.</p>  <p>基板Board: 40*100mm 厚Thickness: 1.0mm</p>	Change from an initial value L : within±10%
固着强度 Adhesion strength	<p>按箭头方向用R0.5 的加压棒在试件中施加一定的静力并保持60±5秒。</p> <p>A static load using a R0.5 pressing tool shall be applied the arrow and to the body of the specimen in the direction of the arrow and shall be hold for 60±5s. Measure after removing pressure.</p> 	Change from an initial value L : within±10%

耐振性 Vibration	<p>振动频率10 ~ 55 ~ 10Hz, 振幅1.5mm, 分X,Y,Z 方向各振动1 小时 ( 共3 小时 ) 。</p> <p>The specimen shall be subjected to a vibration of 1.5mm amplitude, sweep frequency 10~55Hz (10Hz to 55Hz to 10Hz in a period of one minute) for 1 h in each of 3(X,Y,Z) axes.</p>	Change from an initial value L : within±10%
耐冲击性 Mechanical shock	<p>利用橡胶块式落下冲击试验机，分别在3 个互相垂直的方向以981m/S<sup>2</sup> 的冲击加速度落下。</p> <p>Peak acceleration: 981 m/S<sup>2</sup> Duration of pulse: 6ms 3 times in each of 3(X,Y,Z)axes. The specimen must be fixed on test board. Three successive shock shall be applied in the perpendicular direction of each surface of the specimen.</p>	Change from an initial value L : within±10%
自然落下试验 Free fall test	<p>试件安装在基板上，并固定在重500 克的盒中，由1 米高自由落体，3 个互相垂直的方向各3 次。</p> <p>The specimen must be fixed on test board. It must be equipped with instruments of which weight is 500g. Then it shall be fallen freely from 1m height to rigid wood 3 times in each of three axes.</p>	Change from an initial value L : within±10%
焊锡附着性 Solder ability	<p>试验品的电极深布松香后，在5 ~ 10 秒内焊锡，焊锡槽温度245±5℃，时间：3±0.5 秒。</p> <p>Terminals shall be immersed for 5 to 10 seconds in flux at room temperature. Dip sample into solder bath containing molten solder at 245±5°C for 3±0.5 seconds.</p>	90%以上的面积要被覆盖。 New solder shall cover 90% minimum of the surface immersed.
耐电压 Dielectric strength	<p>在电极与磁材之间加入直流电压100V 通电时间1 分钟。</p> <p>100V DC shall be applied for 60s between the terminal and the core.</p>	没有损害。 Without damage.



<p>焊锡耐热性 Resistance to soldering heat</p>	<p>试验方法Test method 热风炉焊接Reflow soldering method 预热Preheat 150~180°C 90±30s 峰值温度Peak temp 250(+ 5,-0)°C (230°Cmin , 30 ±10s) 试验板的厚度0.8mm 上按上面条件通过两次热风炉。</p> <p>The specimen shall be subjected to the reflow process under the above condition 2 times.Test board shall be 0.8mm thick. Base material shall be glass epoxy resin.</p> <p>测定Measurement 常温常湿中放置于1 小时以上测试。 The specimen shall be stored at standard atmospheric conditions for 1 h in prior to the measurement.</p>	<p>Change from an initial value L : within±10%</p>
<p>绝缘抵抗 Insulation resistance</p>	<p>在电极与磁材之间加入直流电压100V。</p> <p>100V DC shall be applied between the terminal and the core.</p>	<p>100mΩ 以上 100mΩ or more.</p>
<p>耐寒性 Low temperature</p>	<p>在温度-40±3°C中放置500±12 小时后，常温常湿中放置1 小时以上2 小时以内测试。</p> <p>The specimen shall be stored at a temperature of -40±3°C for 500 ±12h. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement Measurement shall be made within 1h.</p>	<p>Change from an initial value L : within±10%</p>
<p>耐热性 Dry heat</p>	<p>在温度125±2°C中放置500±12 小时后，常温常湿中放置1 小时以上2 小时以内测试。</p> <p>The specimen shall be stored at a temperature of 125 ± 2°C for 500± 12h. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement. Measurement shall be made within 1h.</p>	<p>Change from an initial value L : within±10%</p>

耐湿性 Dump heat	<p>在温度<math>60\pm 2^{\circ}\text{C}</math>，湿度90~95%中放置<math>500\pm 12</math>小时后，常温常湿中放置1小时以上2小时以内测试。</p> <p>The specimen shall be stored at a temperature of <math>60\pm 2^{\circ}\text{C}</math> with relative humidity of 90 ~ 95% for <math>500 \pm 2\text{h}</math>. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement. Measurement shall be made within 1h.</p>	Change from an initial value L : within $\pm 10\%$
温度循环 Temperature cycle	<p>以温度<math>-40^{\circ}\text{C}</math>中放置30分钟，在<math>125^{\circ}\text{C}</math>放置30分钟，中间转换时间不超过2分钟为一个循环。完成500个循环后，常温常湿中放置1小时以上2小时以内测试。</p> <p>The specimen shall be subjected to 500 continuous cycles of temperature change of <math>-40^{\circ}\text{C}</math> for 30 min and <math>125^{\circ}\text{C}</math> for 30 min with the transit period of 2min or less. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement. Measurement shall be made within 1h.</p>	Change from an initial value L : within $\pm 10\%$

**标准状态Standard atmospheric conditions**

Unless otherwise specified, the standard range of atmospheric conditions in making measurements and test as follows;

Ambient temperature :  $5^{\circ}\text{C}$  to  $35^{\circ}\text{C}$ , Relative humidity: 45% to 85%, Air pressure: 86kPa to 106kPa

If more strict measurement is required, measurement shall be made within following limits;

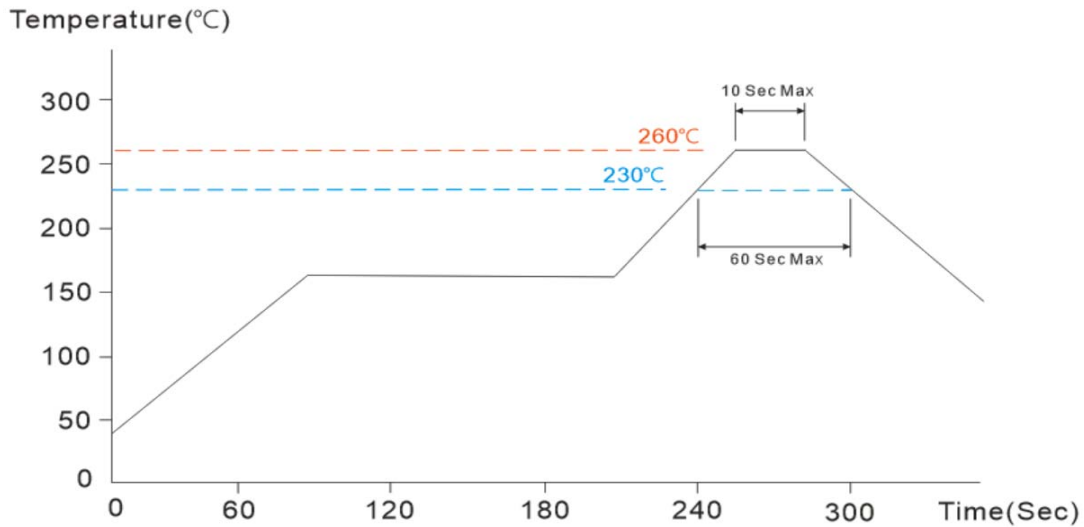
Ambient temperature :  $20\pm 2^{\circ}\text{C}$ , Relative humidity:  $65\pm 5\%$ , Air pressure: 86kPa to 106kPa

**禁用物质Prohibited Substances**

我公司保证我司的产品和生产过程符合“RoHS 规则”，所有产品中使用的材料均是化学物质生产规则中登记的材料。

We confirm that our products and our production process accord with "rule of RoHS". All materials used in this product are registered material under the law concerning the examination and Regulation of Manufacture of Chemical Substances.

### ⊕ Reflow Soldering Heat Endurance

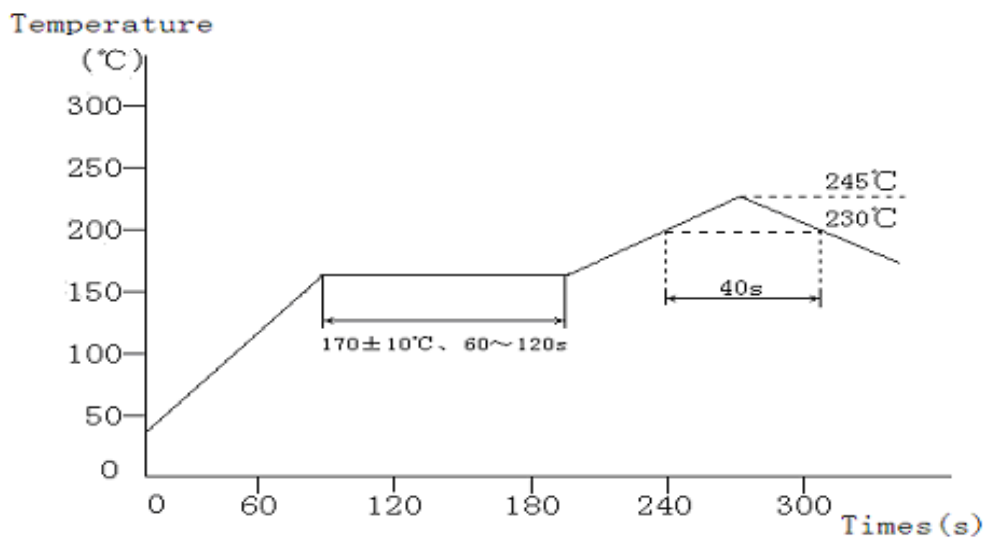


No mechanical and electrical defects are found after testing based on the above profile and keeping under the conditions of room temperature and humidity for 2 hours.

Twice reflow test is acceptable with the test interval remaining 1 hour under the normal conditions.

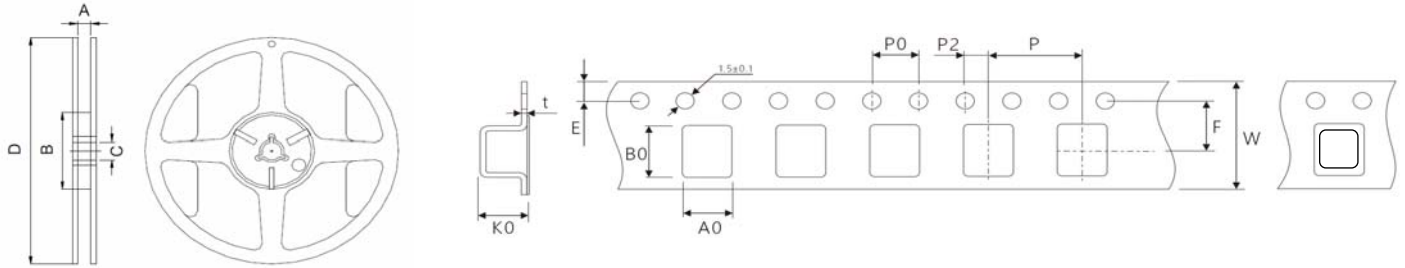
The reflow test profile may vary with the testing instruments.

### ⊕ Recommended Reflow Conditions



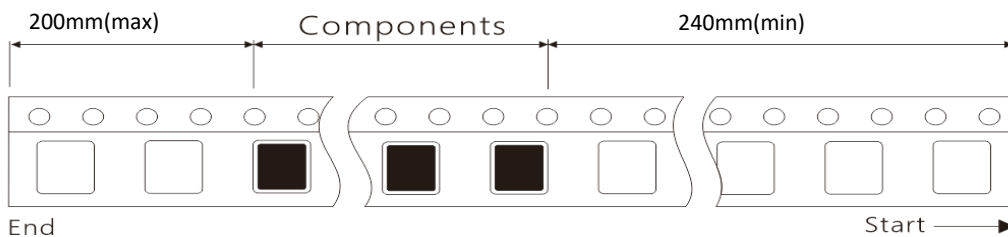
The recommended reflow profile is based on the testing instruments used. Solder ability will depend on the testing equipments, reflow conditions, testing method, etc. So it is necessary to make a confirmation of them when the reflow conditions are set up.

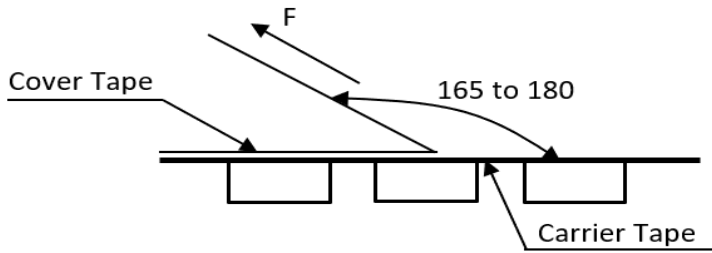
However halogen lamp shall be used, side heat will be beyond range of resistance heat, so we can't recommend it.

**⊕Reel Dimension(m/m)**
**⊕Taping Dimension(m/m)**


Item	A	B	C	D	Applicable Models
7"x8	8.5±1	58±1	13±1	178±1	MFPL100706、MFPL121006H、MFPL141206H、MFPL141208H、MFPL160806H、MFPL160808H、MFPL160810H、MFPL201206H、MFPL201208H、MFPL201210H、MFPL201608H、MFPL201610H、MFPL201612H、MFPL252008H、MFPL252010H、MFPL252012H、MFPL322510H、MFPL322512H Series
7"x12	12.5±1	58±1	13±1	178±1	MFPL303018、MFPL303012 Series

Item	W	Ao	Bo	Ko	E	F	P	P0	P2	t
MFPL100706H	8±0.3	0.90±0.1	1.20±0.1	0.80±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.23±0.05
MFPL121006H	8±0.3	1.30±0.1	1.50±0.1	0.80±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.23±0.05
MFPL141206H	8±0.3	1.45±0.1	1.70±0.1	0.80±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL141208H	8±0.3	1.45±0.1	1.70±0.1	1.00±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL160806H	8±0.3	1.05±0.1	1.85±0.1	0.80±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL160808H	8±0.3	1.05±0.1	1.85±0.1	1.00±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL160810H	8±0.3	1.05±0.1	1.85±0.1	1.20±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL201206H	8±0.3	1.45±0.1	2.25±0.1	0.80±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL201208H	8±0.3	1.45±0.1	2.25±0.1	1.00±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL201210H	8±0.3	1.45±0.1	2.25±0.1	1.20±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL201608H	8±0.3	1.85±0.1	2.25±0.1	1.00±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL201610H	8±0.3	1.85±0.1	2.25±0.1	1.20±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL201612H	8±0.3	1.85±0.1	2.25±0.1	1.35±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL252008H	8±0.3	2.40±0.1	2.85±0.1	1.00±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL252010H	8±0.3	2.40±0.1	2.85±0.1	1.20±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL252012H	8±0.3	2.40±0.1	2.85±0.1	1.35±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL322510H	8±0.3	2.90±0.1	3.50±0.1	1.20±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL322512H	8±0.3	2.90±0.1	3.50±0.1	1.40±0.1	1.75±0.1	3.5±0.1	4.0±0.1	4±0.1	2±0.1	0.25±0.05
MFPL303018H	12±0.3	3.40±0.1	3.40±0.1	2.00±0.1	1.75±0.1	5.5±0.1	8.0±0.1	4±0.1	2±0.1	0.35±0.05
MFPL303020H	12±0.3	3.40±0.1	3.40±0.1	2.20±0.1	1.75±0.1	5.5±0.1	8.0±0.1	4±0.1	2±0.1	0.35±0.05

**⊕Taping method**


**⊕ Taping Off Force**


in the arrow direction under the following conditio			
Room Temp	Room Humidity	Room atrn	Teaming Speed
(°C)	(%)	(hPa)	(mm/min)
5~35	45~85	860~1060	300

**⊕ Packaging Carton**

Item	Reel Packing	Inner Box Packing	Carton Packing
MFPL100706H	5,000 PCS / Reel	15,000 PCS / Box	150,000 PCS / Box
MFPL121006H	5,000 PCS / Reel	15,000 PCS / Box	150,000 PCS / Box
MFPL141206H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL160806H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL160808H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL160810H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL201206H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL201208H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL201210H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL201608H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL201610H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL201612H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL252008H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL252010H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL252012H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL322510H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL322512H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL303018H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box
MFPL303020H	3,000 PCS / Reel	12,000 PCS / Box	120,000 PCS / Box

